


ELECRAFT AX-LINE ANTENNAS

COMPARISON CHART

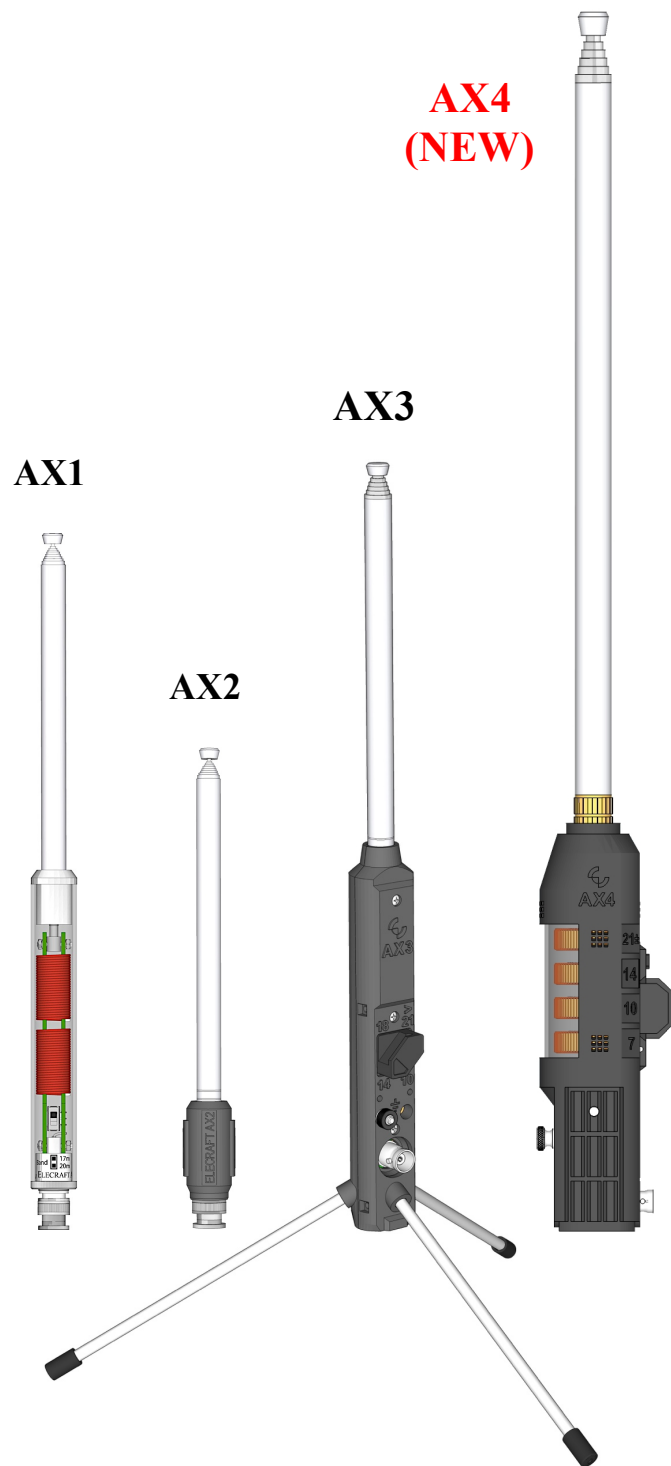

	AX1	AX2	AX3	AX4
Bands (with ATU)	2 (20-17 m)	1 (20 m*)	6 (30-10 m)	7 (40-10 m)
Power Rating, Max	30 W	15 W	30 W	100 W**
Relative Gain	-	-	-	6 dB
Length, Extended	50" (127 cm)	50" (127 cm)	50" (127 cm)	98" (250 cm)
Length, Collapsed	6" (15 cm)	6" (15 cm)	6" (15 cm)	13" (33 cm)
Built-in Tripod	-	-	Yes (6" legs)	-
Tripod Mount (1/4-20)	-	-	Yes	Yes
Picnic Table Clamp	-	-	-	AXTC4
BNC Orientation	Straight	Straight	Right Angle	Right Angle
Band Switch	2 Positions	-	4 positions	4 positions
Ground Post	-	-	Yes	Yes
Fully Disassembles	Yes	Yes	Yes	Yes
40 m Adapter	Yes	Yes	Yes	Not Needed

* The AX2 is user-modifiable for 17-6 m by removing coil turns.

** See AX4 manual for detailed power and duty cycle specifications. Above 30 W, a high-isolation balun is strongly recommended (Elecraft BL3 or equivalent).