


# ELECRAFT AX-LINE ANTENNAS

## COMPARISON CHART

All AX-line antennas are designed for lightweight portable operation. These whips are intended to be used with an ATU to compensate for terrain, body capacitance, height, inductance variance, and counterpoise length. For details, please refer to product brochures.

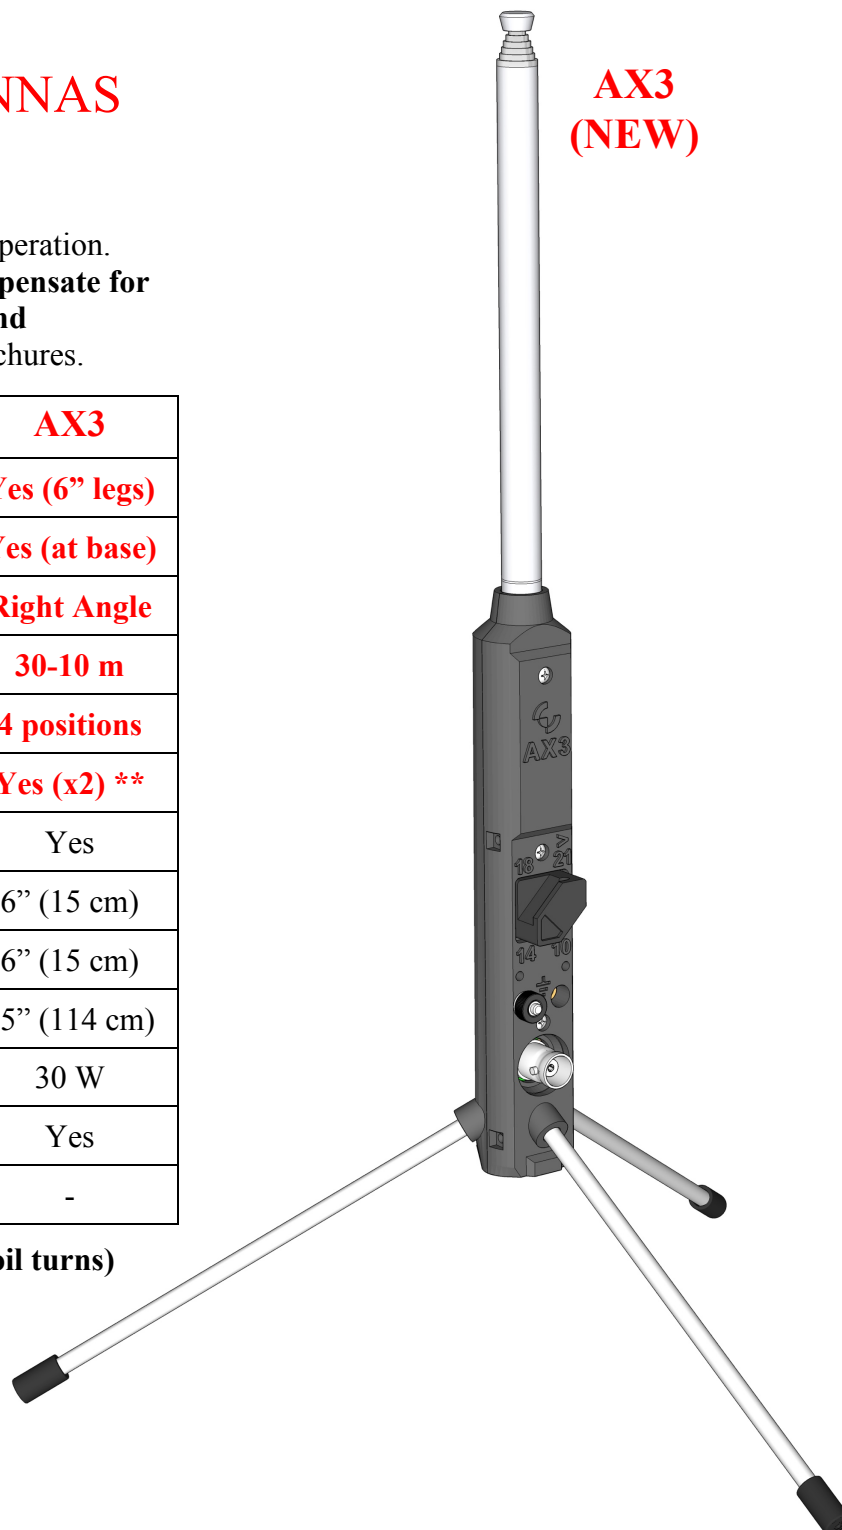

	<b>AX1</b>	<b>AX2</b>	<b>AX3</b>
<b>Tripod built in</b>	-	-	<b>Yes (6" legs)</b>
<b>1/4-20 Mount</b>	-	-	<b>Yes (at base)</b>
<b>BNC Orientation</b>	Straight	Straight	<b>Right Angle</b>
<b>Bands (with ATU)</b>	20-17 m	20 m*	<b>30-10 m</b>
<b>Band Switch</b>	2 Positions	-	<b>4 positions</b>
<b>Ground Connection</b>	-	-	<b>Yes (x2) **</b>
<b>Fully Disassembles</b>	Yes	Yes	Yes
<b>Base Length</b>	6" (15 cm)	2.5" (6.4 cm)	6" (15 cm)
<b>Whip (Collapsed)</b>	6" (15 cm)	6" (15 cm)	6" (15 cm)
<b>Whip (Extended)</b>	45" (114 cm)	45" (114 cm)	45" (114 cm)
<b>Power Rating</b>	30 W	15 W	30 W
<b>40 m Adapter</b>	Yes	Yes	Yes
<b>Bipod Adapter</b>	Yes	Yes	-

\* The AX2 is also user-modifiable for 17-6 m (remove coil turns)

\*\* The AX3 has both a thumb-screw ground post and a mini-banana jack (see p/n KX2GNDPLUG)